



# H3C IE4300 Series Industrial Switches

Release Date: July, 2021



New H3C Technologies Co., Limited

## Product overview


H3C Industrial Ethernet 4300 switch series is H3C's latest industrial Ethernet switches designed for rugged environment and wide operating temperature. IE4300 switch series adhere to industrial grade hardware design and adopts highly reliable industrial grade components, while using the highly developed and tested Comware platform to provide a trustworthy Ethernet solution in wide operating temperature scenarios. IE4300 industrial switch series offer extensive industrial environmental compliance and certifications, and can be widely used in public transport, traffic management, smart building and other extreme temperature scenarios.

H3C IE4300 Industrial switch series come in the following models:

- H3C IE4300-12P-AC : 8 10/100/1000 BASE-T Ethernet ports + 4 1000 BASE-X SFP optical ports;
- H3C IE4300-12P-PWR: 8 10/100/1000 BASE-T Ethernet ports (POE+)+ 4 1000 BASE-X SFP optical ports;



IE4300-12P-AC

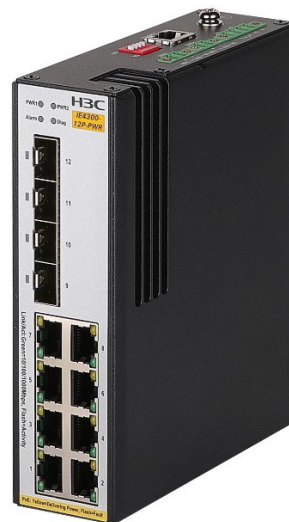

IE4300-12P-PWR

## Features and benefits

### Exceptional Quality, Solid as a Rock

- The IE4300 industrial switch series are the latest Ethernet switches developed with industrial compliance and wide operating temperature in mind. All models are built with industrial grade components, with reliability significantly higher than commercial counterparts running under the same conditions.
- Fanless natural cooling design. Multiple heat dissipation components such as embedded heatsink and thermal adhesive make it perform consistently under harsh environment. Operating temperature ranges from -40°C to 75°C.
- Shock and vibration resistant, dust proof, IP40 compliant.
- Support high level electromagnetic shielding, capable of withstanding electrostatic discharge, surge/burst/electrical fast transients, pulse magnetic field, radiated electrical field.

### Rich Software Features

- IE 4300 industrial switch series integrated the switching, routing, ring network protection and security.
- Support full layer-2 Ethernet feature sets, with 802.1Q VLAN, protocol based VLAN, Voice VLAN, Guest VLAN, Q-in-Q, flexible Q-in-Q encapsulation and multicast VLAN. STP/RSTP/MSTP, 802.3x Ethernet flow control protocol; support QoS congestion management through data classification and prioritization to ensure transmission of mission critical data; support Link Layer Discovery Protocol (LLDP), Link Aggregation Control Protocol (LACP), Device Link Detection Protocol (DLDP), Generic Attribute Registration Protocol (GARP), multicasting at layer 2 and layer 2 features such as VLAN registration protocol and broadcast storm suppression.
- IE4300 switch series supports IPv4 and IPv6 dual stack protocols as well as IPv4 and IPv6 forwarding at full line speed on hardware. It supports IPv4/v6 static routing, routed port, RIP and OSPF (in small scale). In addition, it supports IGMP Snooping, DHCP Server, DHCP Client, DHCP Snooping, DHCP Relay (option 82) and Domain Name System (DNS).
- IE4300 switch series supports Rapid Ring Protection Protocol (RRPP). The Rapid Ring Protection Protocol (RRPP) is a link layer protocol dedicated to Ethernet rings. It prevents broadcast storms caused by data loops when an Ethernet ring is healthy, and rapidly restores the communication paths between the nodes after a link is disconnected on the ring by bringing up the backup link. Compared with STP, RRPP has the following advantages: fast topology convergence (within 50 milliseconds); convergence time independent of Ethernet ring size. On intersecting rings, topology update of an RRPP ring does not ripple to other rings, data transmission thus becomes more stable. RRPP also supports load balancing in Ethernet rings, which improves physical link bandwidth utilization.
- IE4300 industrial switch series implements full Ethernet security features. By enforcing multiple sets of security mechanisms, they effectively limit malware spread and traffic flow attack. The switches supports layer 2 to 4 ACL control, block CPU, ARP and DoS attacks. IEEE 802.1x port-based authentication is a client-server based access control and authentication protocol that restricts unauthorized clients from connecting to a LAN through publicly accessible ports. TACACS+ and RADIUS authentication can implement centralized management for switches, and prevent unauthorized change in user allocation. They also support rapid deployment of End-point Admission Domination (EAD), as well as SAVI-based IPv6 source address validation.
- Ethernet Ring Protection Switching (ERPS) is a ring network protection protocol defined by ITU, G.8032. It is a link layer protocol specially applied to the Ethernet ring network. When the Ethernet ring network is complete, it can prevent broadcast storms caused by the data loop, and when a link on the Ethernet ring network is disconnected, it can quickly restore the communication between various nodes on the ring network.

## Visualization

- H3C IE4300 series industrial switches support Telemetry technology. The real-time resource information and alarm information of the switch can be sent to the operation and maintenance platform through the GRPC protocol. The operation and maintenance platform analyzes real-time data, which can realize network quality backtracking, troubleshooting, risk warning, structure optimization and other functions to accurately guarantee user experience.

## Green Features

- IE4300 switch series implements a variety of green energy saving features, including auto-power-down (port automatic energy saving). If the interface status is always down for a period of time, the system automatically stops the interface power and the system enters power-saving mode. They also support EEE energy feature, by which if a port stays idle for a period of time, the system will set the port to energy-saving mode. The switches are also compliant with material environmental protection and the EU RoHS safety standard.

## Comprehensive Authentication Strategies

- IE4300 industrial switch series supports AAA, RADIUS authentication, user based account, IP, MAC, VLAN and port based dynamic or static user identification and binding. The switches also support H3C iMC to implement real-time user management, diagnose and remove illicit network attack.

## Outstanding Management

- IE4300 industrial switch series management interface supports SNMPv1/V2/v3, Intelligent Management Center (iMC), Command Line Interface (CLI), Web based management, TELNET and FTP configuration. They also support SSH2.0 and SSL encryption to make management safer.

## Power Failure Alarms

- H3C IE4300 industrial switch series provides redundant power supply and support alarms based on power failure.
- H3C IE4300 industrial Switch Series support IEEE Dying Gasp for alarms when a power outage occurs.

## Hardware specifications

Feature	H3C IE4300-12P-AC	H3C IE4300-12P-PWR
Switching capacity	24Gbps	24Gbps
Forwarding capacity	17Mpps	17Mpps
Dimensions (W × D × H)	149*129.8*44mm	149*129.8*44mm
Weight	≤ 1kg	≤ 1kg
10/100/1000 Base-T port	8	8
SFP port	4	4
Input voltage	Single AC: 85~264VAC/100-300VDC	Dual DC power. Rated DC voltage: 54-57V. Max DC voltage: 48-57V *.
Power consumption	MIN: 7W MAX: 12W	MIN: Single DC: 11W Dual DC: 14W MAX: Single DC: 141W Dual DC: 144W
POE	/	Single DC: 125W Dual DC: 125W
Operating temperature	-40~75°C	-40~75°C
Operating relative humidity(noncondensing)	5~95%	5~95%
Operating Environment	<ul style="list-style-type: none"> <li>• International Protection Marking IP40</li> <li>• Lightning-proof Ethernet Port</li> <li>• Electro Static Discharge</li> <li>• Air Discharge: ≥ ±8.0kV</li> <li>• Contact Discharge: ≥ ±6.0kV</li> </ul>	<ul style="list-style-type: none"> <li>• International Protection Marking IP40</li> <li>• Lightning-proof Ethernet Port</li> <li>• Electro Static Discharge</li> <li>• Air Discharge: ≥ ±8.0kV</li> <li>• Contact Discharge: ≥ ±6.0kV</li> </ul>

\*If customers use 48 V DC input, must use extra boost module to support PoE feature.

## Software specifications

Feature	IE4300 switch series
Cluster Management	Support
Port Aggregation	Support
Ethernet Switching	Store-and-Forward
Jumbo Frame	Support
MAC Address Table	<ul style="list-style-type: none"> <li>· 16K MAC Address</li> <li>· Static MAC Address</li> <li>· Black hole MAC Address</li> <li>· MAC Address Learning Limit</li> </ul>
VLAN	<ul style="list-style-type: none"> <li>· Port-based VLAN</li> <li>· MAC-based VLAN</li> <li>· Protocol-based VLAN</li> <li>· Voice VLAN</li> <li>· Guest VLAN</li> <li>· QinQ and Selective QinQ</li> <li>· VLAN Mapping</li> </ul>
ACL	<ul style="list-style-type: none"> <li>· Time Range-based ACL</li> <li>· Layers 2-4 ACL</li> <li>· IPv4/IPv6 ACL</li> <li>· Ingress ACL</li> <li>· Rate-limited ACL</li> </ul>
QoS	<ul style="list-style-type: none"> <li>· Diff-Serv QoS</li> <li>· Flexible queue scheduling algorithms based on ports and queues, including SP, WRR</li> </ul>

	<ul style="list-style-type: none"> <li>and SP+WRR</li> <li>· 802.1p DSCP remarking</li> </ul>
DHCP	<ul style="list-style-type: none"> <li>· DHCP Client</li> <li>· DHCP Snooping</li> <li>· DHCP Snooping Trust</li> <li>· DHCP Snooping option 82 / DHCP Relay option 82</li> </ul>
ARP	<ul style="list-style-type: none"> <li>· Static ARP</li> <li>· Gratuitous ARP</li> <li>· ARP anti-attack</li> <li>· ARP Rate Limiting</li> </ul>
IP Routing	<ul style="list-style-type: none"> <li>· Routed Port</li> <li>· IPv4 Routing: Static Route, RIP</li> <li>· IPv6 Routing: Static Route, Unicast Route</li> </ul>
Multicast	<ul style="list-style-type: none"> <li>· IGMP v1/v2/v3 Snooping</li> <li>· IGMP Snooping Fast-leave</li> <li>· IGMP Snooping Group-policy</li> <li>· IGMP Snooping Proxy</li> <li>· IPv4/IPv6 Multicast VLAN</li> <li>· MLD v1/v2 Snooping</li> <li>· MVR</li> </ul>
Spanning Tree	<ul style="list-style-type: none"> <li>· STP / RSTP / MSTP</li> <li>· STP Root Guard</li> <li>· BPDU Guard</li> <li>· Loop Guard</li> </ul>
Mirroring	<ul style="list-style-type: none"> <li>· Port Mirroring</li> <li>· Remote SPAN (RSPAN)</li> </ul>

<p>Security</p>	<ul style="list-style-type: none"> <li>· Hierarchical User Management and Password Protection</li> <li>· 802.1X Authentication</li> <li>· AAA Authentication</li> <li>· Public Key Infrastructure (PKI)</li> <li>· HWTACACS</li> <li>· SSH 2.0</li> <li>· IP/MAC/Port/VLAN Binding</li> <li>· IP Source Guard</li> <li>· HTTPs</li> <li>· SSL</li> <li>· Dynamic ARP Inspection, Preventing Man-in-the-Middle Attacks and ARP DoS Attacks</li> <li>· SAVI</li> </ul>
<p>IEEE</p>	<ul style="list-style-type: none"> <li>IEEE 802.3x</li> <li>IEEE 802.3ad</li> <li>IEEE 802.3af</li> <li>IEEE 802.3at</li> <li>IEEE 802.1p</li> <li>IEEE 802.1x</li> <li>IEEE 802.1q</li> <li>IEEE 802.1d</li> <li>IEEE 802.1w</li> <li>IEEE 802.1s</li> </ul>
<p>Management and maintenance</p>	<ul style="list-style-type: none"> <li>· Loading and Upgrading through Xmodem / FTP / TFTP</li> <li>· Configuration through CLI, Telnet and Console Port</li> <li>· TR069</li> <li>· 802.1ag and 802.3ah</li> <li>· SNMPv1/v2/v3</li> <li>· iMC NMS</li> <li>· Web-based NMS</li> </ul>



	<ul style="list-style-type: none"> <li>· System Log, Alarms based on Severities, and Output of Debugging Information</li> <li>· Alarms based on Power Failure</li> <li>· NTP</li> <li>· Temperature Alarm</li> <li>· Ping, Tracert, Telnet</li> </ul>
Reliability	<p>Alarms based on Power Failure (only for IE4300 switch series)</p> <p>ERPS( G.8032)</p>

## Ordering Information

Product ID	Product Description
H3C IE4300-12P-AC	8 10/100/1000 BASE-T Ethernet ports + 4 1000 BASE-X SFP optical ports;
H3C IE4300-12P-PWR	8 10/100/1000 BASE-T Ethernet ports (POE)+ 4 1000 BASE-X SFP optical ports;
SFP-GE-LX10-SM1310	1000BASE-LX10 SFP Transceiver, Single Mode (1310nm, 10km, LC,-40~80°C)
H3C IE-150W-PSU	150W POE PSU, DIN-Rail Mount;



The Leader in Digital Solutions

### New H3C Technologies Co., Limited

Beijing Headquarters

Tower 1, LSH Center, 8 Guangshun South Street, Chaoyang District, Beijing, China

Zip: 100102

Hangzhou Headquarters

No.466 Changhe Road, Binjiang District, Hangzhou, Zhejiang, China

Zip: 310052

Tel: +86-571-86760000

Fax: +86-571-86760001

Copyright ©2021 New H3C Technologies Co., Limited Reserves all rights

Disclaimer: Though H3C strives to provide accurate information in this document, we cannot guarantee that details do not contain any technical error or printing error. Therefore, H3C cannot accept responsibility for any inaccuracy in this document.

H3C reserves the right for the modification of the contents herein without prior notification

<http://www.h3c.com>